








- Suit for drill, end mill, hard ware, cutting tool...etc.
- Handy type, it can also use the cutting tool.
- **X**Guaranteed for 3 months.









ORDER NO.	INPUT VOLTAG	CURRENT	POWER	DUTY CYCLE	HOLE CAPACITY	WEIGHT KGS	CODE NO.
VDM-40	AC110V/220V	0.5A	80W	20%	Ø40MM	1.3	2019-030





**Handy Type** 

For Bigger Or Heavy Workpiece

- **X Light Duty Only**
- **X** Guaranteed for 3 months.
- **※ Built-in over-heat safety Stop**

<ul> <li>S</li> </ul>	uit	for	mo	d	ina
- 0	MIL	101	1110	ı	1119.

- Work perfectly in the narrow place.
- No need to remove the workpiece.




	INPUT VOLTAGE	CURRENT	<b>W USING TIME</b>	DIMENSION			WEIGHT	CODE NO.
	(SINGLE PHASE)	OUTULE	A CONTO TIME	L	M	Н	KGS	CODE NO.
VDM-50	110V/220V/1PH	1.2A	Demagnetize 1 minute waiting 4 minutes	345	35	25	1.2	2019-031



# Demagnetizer



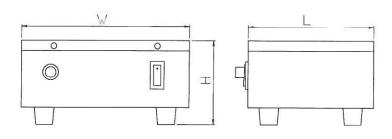

### **FEATURES**

- Suitable for general component spare parts, attachments, tools, etc, forfixed way demagnetization.
- Suitable for longtime use; be able to use continuously for 24 hours. Rest 10 Min Per 3 hrs.
- With the design of double coils inside to avoid heat release.
- X Guaranteed for 3 months.

## DELLIYE TYPE


DELUXE	IFL							Unit:mm
ORDER NO.	INPUT VOLTAGE	CAPACITY	DUTY CYCLE	DIMENSION			NW	CODE
ONDER NO.	INI OI VOLIAGE	CALACITI	DOTTOTOLL	L	W	H	KGS	NO.
VDM-68	110V/220V	AC-330VA	100%	140	195	110	7.4	2019-001





### **FEATURES**

- Input voltage 110-220 Volts AC.
- With On-Off switch.
- Quickly Demagnetizes tools, drills punches, dies,etc. Held by magnetic chucks. Parts are demagnetized by drawing across surface.
- Voltage 200-240 should be ordered.
- **X**Guaranteed for 3 months.



Unit:mm CODE WEIGHT DUTY WORKING ORDER INPUT CAPACITY HEIGHT CYCLE VOLTAGE SURFACE (KGS) NO. NO. 110V 220V 50% 2019-011 160X110 100 4.5 VDM-8 210VA 110V 220V 100% 2019-021 **VDM-11** 550VA 200X280 130 16

## Mini Type Demagnetizer


## FOR HANDY AND CAN NOT BE MOVED OBJECT


- Suitable for large type workpiece.











Unit:mm

ORDER NO.	INPUT VOLTAGE	CAPACITY	WORKING SURFACE	HEIGHT	WEIGHT (KGS)	DUTY	CODE NO.
VDM-9	AC-110V 220V	110VA	123X83	83	1.8	90%	2019-020

# Tunnel Type Demagnetizer And Magnetizer





- Merely using tools to pass through or move into a tunnel will cause a good demagnetizing effect.
- Suitable for planned automatic process; be adapted for delivery belts to proceed in order to increase productivity.
- Suitable for hand manual tools, etc. for filling magnetism.
- Suitable for large production of component spare parts, attachments, tools...etc.
- Suitable for longtime use; be able to use continuously for 24 hours.
- Super efficacy in demagnetizing and magnetizing; suitable for many kinds of metals. Attached a fan inside for dissipating heat.
- **X** Guaranteed for 3 months.

